




CATTINI GENERADORES GASOLINEROS

Lo mejor para tu negocio



RUMI
IMPORT S.A.

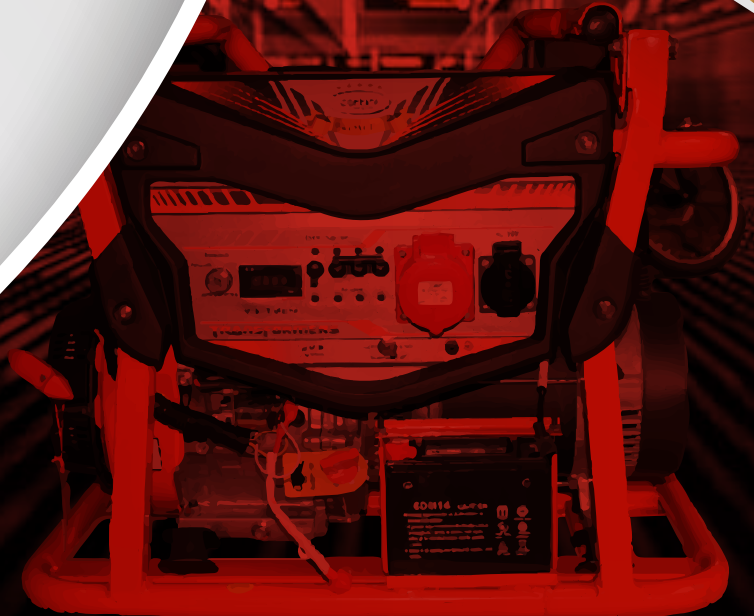

Las imágenes de los productos son referenciales y pueden diferir del producto final.
Las especificaciones técnicas están sujetas a cambios sin previo aviso.

GENERADOR GASOLINERO RI3800-III



COD.70900RI3800III - GENERADOR GASOLINERO RI3800III

GENERATOR SET

AC Frequency 60Hz

AC Output Voltage AC220V monophase

AC Rated Output 2800W

AC Output Max. 3000W

Power Factor 1

CC Output -

AC Output Number 2

ENGINE

Engine	RI210	Max Output (hp/rpm)	7.0/3600
CC Offset	212CC	Fuel Consumption(g/hp.h)	<310
Start System	Recoil	Ignition System	Transistorized magneto ignition
Oil Lubrication	SAE 10W/30	Spark Plug (Model)	F7TC
Oil Capacity	0.6L	Fuel Tank Capacity (l)	15
Compression Rate	8.5:1	Continuous Work (h)	9
Bore x Stroke	70*55	Noise Level LwA db(A)	84.1

STANDARD FEATURES

Oil Alarm	YES	Large Capacity Fuel Tank	YES
Fuel Gauge	YES	Automatic Voltage Adjuster	YES
AC Voltmeter	YES	AC Monophase Out	YES
Standard Socket	YES	AC Threephase Out	NO
AC Circuit Breaker	YES	CC OUT	NO
Large Capacity Air Filter	YES		

PACKAGING

Dimensions (mm)	620*460*530
Gross Weight (Kg)	53.4



GENERADOR GASOLINERO RI3800E-III



COD.7090RI3800EIII - GENERADOR GASOLINERO RI3800E-III

GENERATOR SET

AC Frequency	60Hz
AC Output Voltage	AC220V monophase
AC Rated Output	2800W
AC Output Max.	3000W
Power Factor	1
CC Output	-
AC Output Number	2
Batery	12V

ENGINE

Engine	RI210	Max Output (hp/rpm)	7.0/3600
CC Offset	212CC	Fuel Consumption(g/hp.h)	<310
Start System	Recoil	Ignition System	Transistorized magneto ignition
Oil Lubrication	SAE 10W/30	Spark Plug (Model)	F7TC
Oil Capacity	0.6L	Fuel Tank Capacity (l)	15
Compression Rate	8.5:1	Continuous Work (h)	9
Bore x Stroke	70*55	Noise Level LwA db(A)	84.1


STANDARD FEATURES

Oil Alarm	YES	Large Capacity Fuel Tank	YES
Fuel Gauge	YES	Automatic Voltage Adjuster	YES
AC Voltmeter	YES	AC Monophase Out	YES
Standard Socket	YES	AC Threephase Out	NO
AC Circuit Breaker	YES	CC OUT	NO
Large Capacity Air Filter	YES		

PACKAGING

Dimensions (mm) 620*460*530

Gross Weight (Kg) 56.8

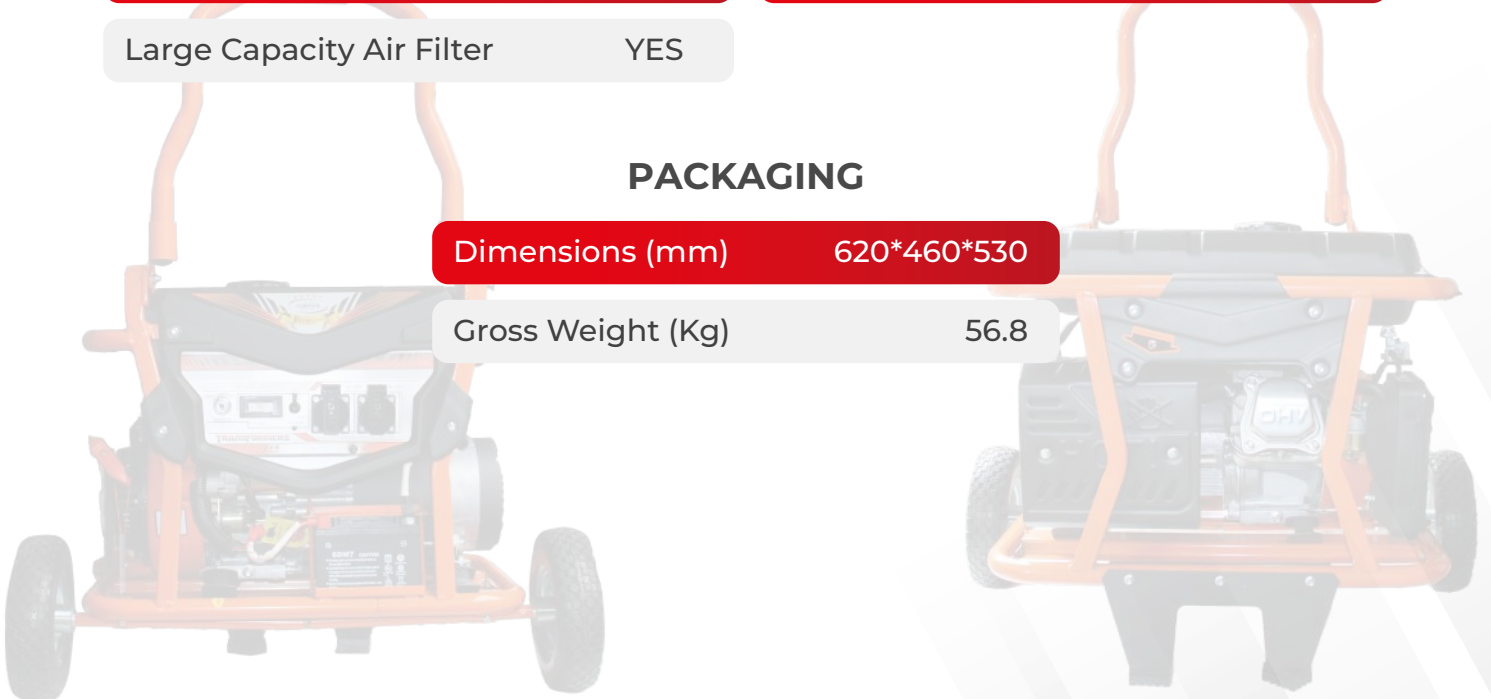

GENERADOR GASOLINERO RI6500E-III



COD.7090RI6500EIII - GENERADOR GASOLINERO RI6500E-III

GENERATOR SET

AC Frequency	60Hz
AC Output Voltage	AC220V/380V threephase
AC Rated Output	5000W
AC Output Max.	5500W
Power Factor	0.8
CC Output	-
AC Output Number	2
Batery	12V

ENGINE

Engine	RI420	Max Output (hp/rpm)	11.2/3600
CC Offset	420CC	Fuel Consumption(g/hp.h)	<330
Start System	Recoil/Electric	Ignition System	Transistorized magneto ignition
Oil Lubrication	SAE 10W/30	Spark Plug (Model)	F7TC
Oil Capacity	1.1L	Fuel Tank Capacity (l)	25
Compression Rate	8.5:1	Continuous Work (h)	9
Bore x Stroke	90*66	Noise Level LwA db(A)	88

STANDARD FEATURES

Oil Alarm	YES	Large Capacity Fuel Tank	YES
Fuel Gauge	YES	Automatic Voltage Adjuster	YES
AC Voltmeter	YES	AC Monophase Out	YES
Standard Socket	YES	AC Threephase Out	YES
AC Circuit Breaker	YES	CC OUT	NO
Large Capacity Air Filter	YES		

PACKAGING



Dimensions (mm) 720*585*615

Gross Weight (Kg) 92.7



GENERADOR GASOLINERO RI8000E-III



COD.7090RI8000EIII - GENERADOR GASOLINERO RI8000E-III

GENERATOR SET

AC Frequency	60Hz
AC Output Voltage	AC220V/380V threephase
AC Rated Output	6000W
AC Output Max.	6500W
Power Factor	0.8
CC Output	-
AC Output Number	2
Batery	12V

ENGINE

Engine	RI420	Max Output (hp/rpm)	11.2/3600
CC Offset	420CC	Fuel Consumption(g/hp.h)	<330
Start System	Recoil/Electric	Ignition System	Transistorized magneto ignition
Oil Lubrication	SAE 10W/30	Spark Plug (Model)	F7TC
Oil Capacity	1.1L	Fuel Tank Capacity (l)	25
Compression Rate	8.5:1	Continuous Work (h)	9
Bore x Stroke	90*66	Noise Level LwA db(A)	88

STANDARD FEATURES

Oil Alarm	YES	Large Capacity Fuel Tank	YES
Fuel Gauge	YES	Automatic Voltage Adjuster	YES
AC Voltmeter	YES	AC Monophase Out	YES
Standard Socket	YES	AC Threephase Out	YES
AC Circuit Breaker	YES	CC OUT	NO
Large Capacity Air Filter	YES		

PACKAGING

Dimensions (mm)	720*585*615
Gross Weight (Kg)	94.6



GENERADOR GASOLINERO RI10000E-III 220V



COD.709RI1000220 - GENERADOR GASOLINERO RI10000E-III-220V

GENERATOR SET

AC Frequency	60Hz
AC Output Voltage	AC220V monophase
AC Rated Output	7000W
AC Output Max.	7500W
Power Factor	1
CC Output	-
AC Output Number	2
Batery	12V

ENGINE

Engine	RI450	Max Output (hp/rpm)	11.5/3600
CC Offset	445CC	Fuel Consumption(g/hp.h)	<330
Start System	Recoil/Electric	Ignition System	Transistorized magneto ignition
Oil Lubrication	SAE 10W/30	Spark Plug (Model)	F7TC
Oil Capacity	1.1L	Fuel Tank Capacity (l)	25
Compression Rate	8.5:1	Continuous Work (h)	9
Bore x Stroke	92*67	Noise Level LwA db(A)	93

STANDARD FEATURES

Oil Alarm	YES	Large Capacity Fuel Tank	YES
Fuel Gauge	YES	Automatic Voltage Adjuster	YES
AC Voltmeter	YES	AC Monophase Out	YES
Standard Socket	YES	AC Threephase Out	NO
AC Circuit Breaker	YES	CC OUT	NO
Large Capacity Air Filter	YES		

PACKAGING

Dimensions (mm) 720*585*615

Gross Weight (Kg) 96.5



GENERADOR GASOLINERO RI10000E-III



COD.709RI10000EIII - GENERADOR GASOLINERO RI10000-EIII

GENERATOR SET

AC Frequency	60Hz
AC Output Voltage	AC220V/380V threephase
AC Rated Output	7000W
AC Output Max.	7500W
Power Factor	0.8
CC Output	-
AC Output Number	2
Batery	12V

ENGINE

Engine	RI450	Max Output (hp/rpm)	11.5/3600
CC Offset	445CC	Fuel Consumption(g/hp.h)	<330
Start System	Recoil/Electric	Ignition System	Transistorized magneto ignition
Oil Lubrication	SAE 10W/30	Spark Plug (Model)	F7TC
Oil Capacity	1.1L	Fuel Tank Capacity (l)	25
Compression Rate	8.5:1	Continuous Work (h)	9
Bore x Stroke	92*67	Noise Level LwA db(A)	93

STANDARD FEATURES

Oil Alarm	YES	Large Capacity Fuel Tank	YES
Fuel Gauge	YES	Automatic Voltage Adjuster	YES
AC Voltmeter	YES	AC Monophase Out	YES
Standard Socket	YES	AC Threephase Out	YES
AC Circuit Breaker	YES	CC OUT	NO
Large Capacity Air Filter	YES		

PACKAGING

Dimensions (mm)	720*585*615
Gross Weight (Kg)	98.2



GENERADOR GASOLINERO RI1500



COD.70900RI1500 - GENERADOR GASOLINERO RI1500

GENERATOR SET

AC Frequency	60Hz
AC Output Voltage	AC220V monophase
AC Rated Output	800W
AC Output Max.	1000W
Power Factor	1
CC Output	-
AC Output Number	1

ENGINE

Engine	RI100	Max Output (hp/rpm)	3.0/3600
CC Offset	98CC	Fuel Consumption(g/hp.h)	<294
Start System	Recoil	Ignition System	Transistorized magneto ignition
Oil Lubrication	SAE 10W/30	Spark Plug (Model)	F7TC
Oil Capacity	0.35L	Fuel Tank Capacity (l)	6
Compression Rate	5.6:1	Continuous Work (h)	9
Bore x Stroke	54*40	Noise Level LwA db(A)	75

STANDARD FEATURES

Oil Alarm	YES	Large Capacity Fuel Tank	YES
Fuel Gauge	YES	Automatic Voltage Adjuster	YES
AC Voltmeter	YES	AC Monophase Out	YES
Standard Socket	YES	AC Threephase Out	NO
AC Circuit Breaker	YES	CC OUT	NO
Large Capacity Air Filter	YES		

PACKAGING

Dimensions (mm)	485*380*450
Gross Weight (Kg)	26.5



GENERADOR GASOLINERO RI3000



COD.70900RI3000 - GENERADOR GASOLINERO RI3000

GENERATOR SET

AC Frequency	60Hz
AC Output Voltage	AC220V monophase
AC Rated Output	2500W
AC Output Max.	2800W
Power Factor	1
CC Output	-
AC Output Number	2

ENGINE


Engine	RI210	Max Output (hp/rpm)	7.0/3600
CC Offset	212CC	Fuel Consumption(g/hp.h)	<310
Start System	Recoil	Ignition System	Transistorized magneto ignition
Oil Lubrication	SAE 10W/30	Spark Plug (Model)	F7TC
Oil Capacity	0.6L	Fuel Tank Capacity (l)	15
Compression Rate	8.5:1	Continuous Work (h)	9
Bore x Stroke	70*55	Noise Level LwA db(A)	84.1

STANDARD FEATURES

Oil Alarm	YES	Large Capacity Fuel Tank	YES
Fuel Gauge	YES	Automatic Voltage Adjuster	YES
AC Voltmeter	YES	AC Monophase Out	YES
Standard Socket	YES	AC Threephase Out	NO
AC Circuit Breaker	YES	CC OUT	NO
Large Capacity Air Filter	YES		

PACKAGING

Dimensions (mm)	605*450*470
Gross Weight (Kg)	44

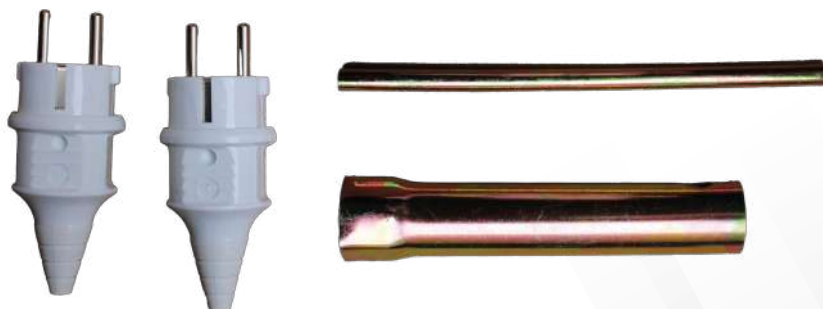

GENERADOR GASOLINERO RI3500



COD.70900RI3500 - GENERADOR GASOLINERO RI3500

GENERATOR SET

AC Frequency	60Hz
AC Output Voltage	AC220V monophase
AC Rated Output	2800W
AC Output Max.	3000W
Power Factor	1
CC Output	-
AC Output Number	2

ENGINE

Engine	RI210	Max Output (hp/rpm)	7.0/3600
CC Offset	212CC	Fuel Consumption(g/hp.h)	<310
Start System	Recoil	Ignition System	Transistorized magneto ignition
Oil Lubrication	SAE 10W/30	Spark Plug (Model)	F7TC
Oil Capacity	0.6L	Fuel Tank Capacity (l)	15
Compression Rate	8.5:1	Continuous Work (h)	9
Bore x Stroke	70*55	Noise Level LwA db(A)	84.1

STANDARD FEATURES

Oil Alarm	YES	Large Capacity Fuel Tank	YES
Fuel Gauge	YES	Automatic Voltage Adjuster	YES
AC Voltmeter	YES	AC Monophase Out	YES
Standard Socket	YES	AC Threephase Out	NO
AC Circuit Breaker	YES	CC OUT	NO
Large Capacity Air Filter	YES		

PACKAGING

Dimensions (mm) 605*450*470

Gross Weight (Kg) 45



GENERADOR GASOLINERO RI6500E



COD.7090RI6500E - GENERADOR GASOLINERO RI6500E

GENERATOR SET

AC Frequency	60Hz
AC Output Voltage	AC220V monophase
AC Rated Output	6000W
AC Output Max.	6500W
Power Factor	1
CC Output	-
AC Output Number	2
Batery	12V

ENGINE

Engine	RI420	Max Output (hp/rpm)	11.2/3600
CC Offset	420CC	Fuel Consumption(g/hp.h)	<330
Start System	Recoil	Ignition System	Transistorized magneto ignition
Oil Lubrication	SAE 10W/30	Spark Plug (Model)	F7TC
Oil Capacity	1.1L	Fuel Tank Capacity (l)	25
Compression Rate	8.5:1	Continuous Work (h)	9
Bore x Stroke	90*66	Noise Level LwA db(A)	88

STANDARD FEATURES

Oil Alarm	YES	Large Capacity Fuel Tank	YES
Fuel Gauge	YES	Automatic Voltage Adjuster	YES
AC Voltmeter	YES	AC Monophase Out	YES
Standard Socket	YES	AC Threephase Out	NO
AC Circuit Breaker	YES	CC OUT	NO
Large Capacity Air Filter	YES		

PACKAGING

Dimensions (mm) 700*540*570

Gross Weight (Kg) 88.8



GENERADOR GASOLINERO RI8000E



COD.7090RI8000E - GENERADOR GASOLINERO RI8000E

GENERATOR SET

AC Frequency	60Hz
AC Output Voltage	AC220V monophase
AC Rated Output	7000W
AC Output Max.	7500W
Power Factor	1
CC Output	-
AC Output Number	2
Batery	12V

ENGINE

Engine	RI450	Max Output (hp/rpm)	11.5/3600
CC Offset	445CC	Fuel Consumption(g/hp.h)	<330
Start System	Recoil/Electric	Ignition System	Transistorized magneto ignition
Oil Lubrication	SAE 10W/30	Spark Plug (Model)	F7TC
Oil Capacity	1.1L	Fuel Tank Capacity (l)	25
Compression Rate	8.5:1	Continuous Work (h)	9
Bore x Stroke	92*67	Noise Level LwA db(A)	88

STANDARD FEATURES

Oil Alarm	YES	Large Capacity Fuel Tank	YES
Fuel Gauge	YES	Automatic Voltage Adjuster	YES
AC Voltmeter	YES	AC Monophase Out	YES
Standard Socket	YES	AC Threephase Out	NO
AC Circuit Breaker	YES	CC OUT	NO
Large Capacity Air Filter	YES		

PACKAGING



Dimensions (mm) 700*540*570

Gross Weight (Kg) 92.4

